


AIGI 23

Special Abrasion Resistant Packing

AIGI 23 is a braided PTFE fiber packing with high strength Aramid fiber corners. Because of the Aramid fiber's high strength and PTFE's self-lubrication, AIGI 23 has excellent flexibility and abrasion resistance. With the addition of a post braiding PTFE lubricant, AIGI 23 significantly reduces shaft wear normally associated with Aramid fiber packings. AIGI 23 is designed to be used in aggressive slurry and high abrasive content applications.

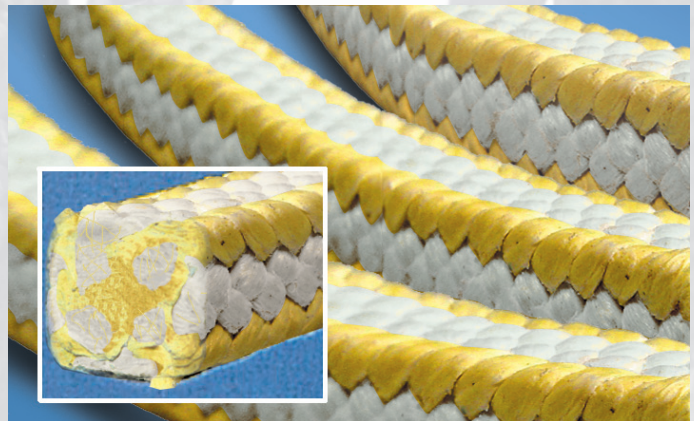

Property

Value

Color

Yellow / White

Temperature

260°C (500°F)

PH Range

4 ~ 12

Speed

10m/s (2000 Ft/min)

Pressure

25kgf/cm² (360 PSI)

** Lab results for individual production lots tested; some variability will occur.*

Application

Slurry and abrasive pump applications in mining, power, sewerage and pulp and paper

