


# **AIGI 23SC**

## *AIGI 23 with Single Silicone Rubber Cores*

***AIGI 23SC adds a resilient single silicone rubber core to AIGI 23 packing .The elastic rubber core gives the packing better memory, allowing it to withstand radial shaft motion and vibration while maintaining excellent leakage control with minimal gland adjustment. AIGI 23SC has excellent flexiblability and abrasion resistance. With the addition of of a post braiding PTFE lubricant, AIGI 23SC significantly reduces the shaft wear normally associated with Aramid fiber packings.***

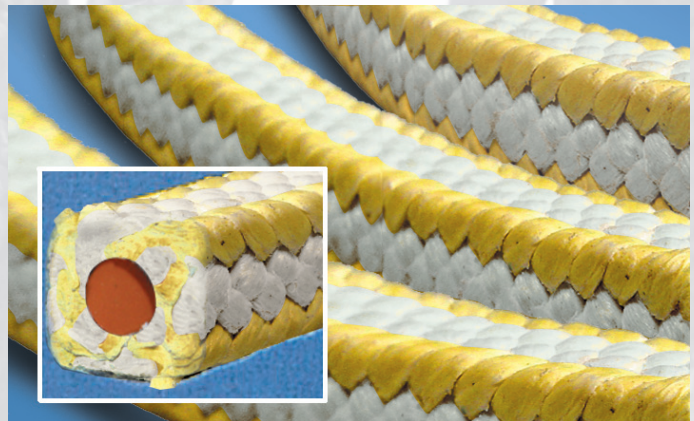

### **Property**

### **Value**

**Color**

**Yellow / White**

**Temperature**

**260°C (500°F)**

**PH Range**

**4 ~ 11**

**Speed**

**10m/s (2000 Ft/min)**

**Pressure**

**25kgf/cm<sup>2</sup> (360 PSI)**

*\* Lab results for individual production lots tested; some variability will occur.*

### **Application**

***Pumps, mixers and agitators in aggressive slurry applications in mining, power and sewage***

