


# **AIGI 25SC**

## *AIGI 25 with Single Silicone Rubber Core*

***AIGI 25SC adds a resilient single silicone rubber core to AIGI 25 packing. The elastic rubber core gives the packing better memory, allowing it to withstand radial shaft motion and vibration while maintaining excellent leakage control with minimal gland adjustment. AIGI 25SC provides additional shaft stability in difficult abrasive and slurry applications for longer life.***

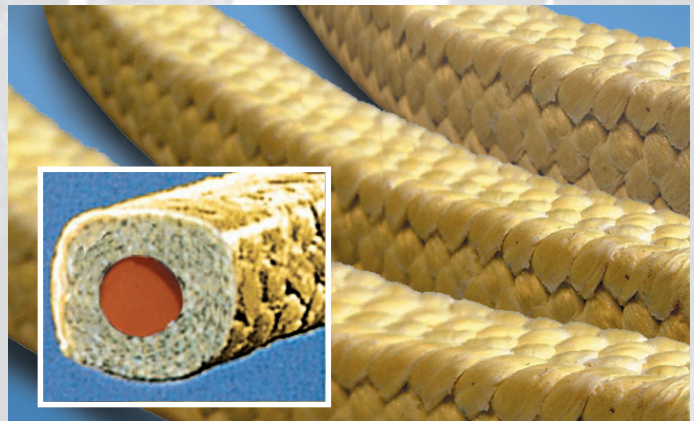

<b><i>Property</i></b>	<b><i>Value</i></b>
<b><i>Color</i></b>	<b><i>Yellow</i></b>
<b><i>Temperature</i></b>	<b><i>240°C (465°F)</i></b>
<b><i>PH Range</i></b>	<b><i>4 ~ 11</i></b>
<b><i>Speed</i></b>	<b><i>10m/s (2000 Ft/min)</i></b>
<b><i>Pressure</i></b>	<b><i>25kgf/cm<sup>2</sup> (360 PSI)</i></b>
<b><i>Reciprocating Pressure</i></b>	<b><i>200kgf/cm<sup>2</sup> (2900 PSI)</i></b>

*\* Lab results for individual production lots tested; some variability will occur.*

### ***Application***

***Pumps, mixers and agitators in mining, steel, sewage, pulp and paper***

