


AIGI 26

General Service Pump Packing

AIGI 26 is braided from PTFE yarn and then coated with a graphite dispersion to disipate heat, AIGI 26 is a dense braid which ensures excellent leakage control, less lubricant migration, less frictional heat build up and excellent heat disipation for longer life. As a low-friction packing, AIGI 26 is used widely in general service pump applications as well as the toughest chemical applications.

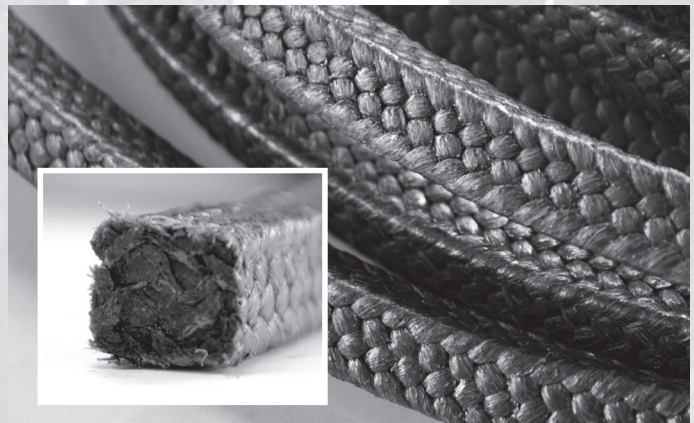

Property

Value

Color

Black

Temperature

260°C (500°F)

PH Range

0 ~ 14

Speed

10m/s (2000 Ft/min)

Pressure

40kgf/cm² (580 PSI)

** Lab results for individual production lots tested; some variability will occur.*

Application

Universal pump packing suitable for chemicals, water, acid, alkalies and light slurries



AIGI ENVIRONMENTAL INCORPORATED

www.aigienviromental.com