


AIGI 26MSC

AIGI 26 with Multi-Silicone Rubber Cores

AIGI 26MSC adds resilient multi-silicone rubber cores to AIGI 26 packing. The elastic rubber core gives the packing better memory, allowing it to withstand radial shaft motion and vibration while maintaining excellent leakage control with minimal gland adjustment. As a low-friction, dense packing, AIGI 26MSC is used in pumps, mixers and agitators to stabilize extreme runout conditions.

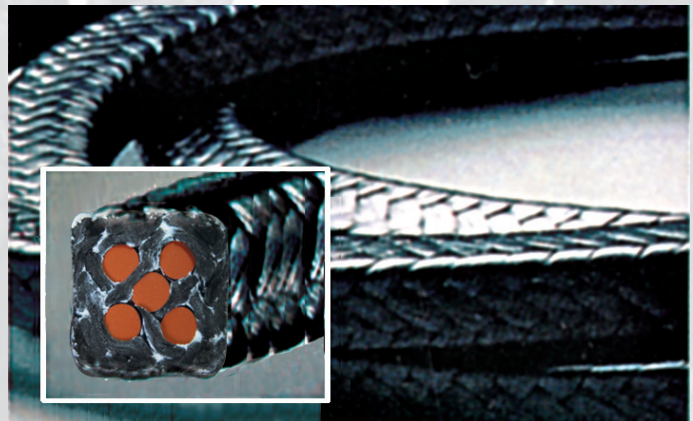

Property

Value

Color

Black

Temperature

260°C (500°F)

PH Range

2 ~ 12

Speed

10m/s (2000 Ft/min)

Pressure

40kgf/cm² (580 PSI)

** Lab results for individual production lots tested; some variability will occur.*

Application

General service packing for pumps, mixers and agitators where extreme radial runout exists

